



## 35W PA Amplifier

- Compact Table type Mixer Amp
- Euro Block Terminals for Easy Installation
- Telephone Input (TEL IN) Terminal

Public Address Amplifier

# PA-935N

# PA-935N



35W Compact PA Mixer Amplifier with Euro block terminals for easy Installation.

## features

- Rated Output 35W PA Mixer Amplifier
- MIC 1~3, AUX, CD / SATELLITE Inputs
- TELEPHONE input terminal for TELEPHONE PAGING SYSTEM
- MIC 1 and TELEPHONE input PRIORITY function over other input signal

## specification

0dBV = 1.0Vrms


Rated Output Power (at 1kHz, T.H.D : 3%)		35W (RMS)			
Frequency Response (+0, -3dB)	MIC 1, 2, 3	150Hz - 12kHz			
	AUX	80Hz - 15kHz			
	CD / SATELLITE	80Hz - 15kHz			
	TELEPHONE	330Hz - 3kHz			
T.H.D (at Rated Output -5dB, 1kHz)		Less Than 1%			
S/N	MIC 1, 2, 3	Better than 60dB			
	AUX, CD / SATELLITE, TELEPHONE	Better than 75dB			
Input Sensitivity / Impedance	MIC 1, 2, 3	-50dBV / 600Ω			
	AUX	-15dBV / 10kΩ			
	CD / SATELLITE	-15dBV / 10kΩ			
	TELEPHONE	EC & Associated : 0.775V / 600Ω, USA / CANADA & Associated : 0.3V / 600Ω			
Output Voltage / Impedance	EC & Associated	4Ω / 11.8V	8Ω / 16.7V	140Ω / 70V	285Ω / 100V
	USA / CANADA & Associated	4Ω / 11.8V	8Ω / 16.7V	18Ω / 25V	140Ω / 70V
Operating Temperature		-10°C ~ +40°			
Power Source		100-120VAC or 220-240VAC, 50/60Hz (Supplied AC mains transformer depends on country requirements)			
Power Consumption		1/8 POWER : 40W, 1/3 POWER : 50W, FULL POWER : 80W			

\*Specifications and design subject to change without notice for improvements.


# Front Panel




# Rear Panel

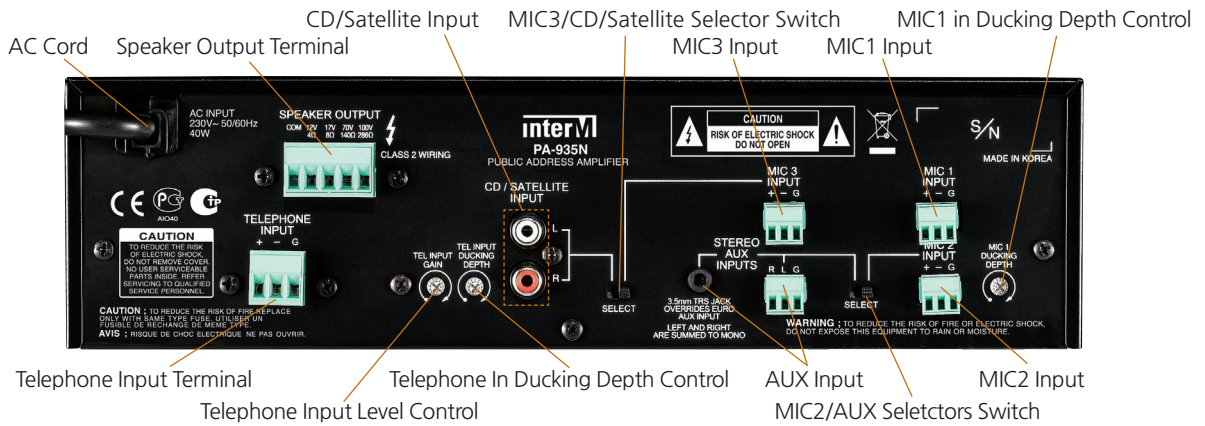

# Dimension

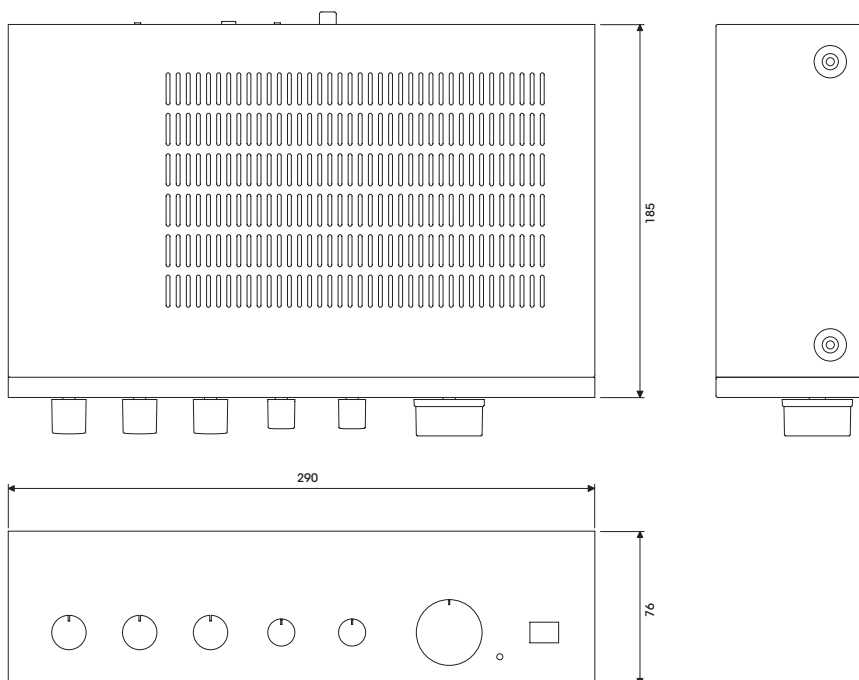

# \*PA-935N Application

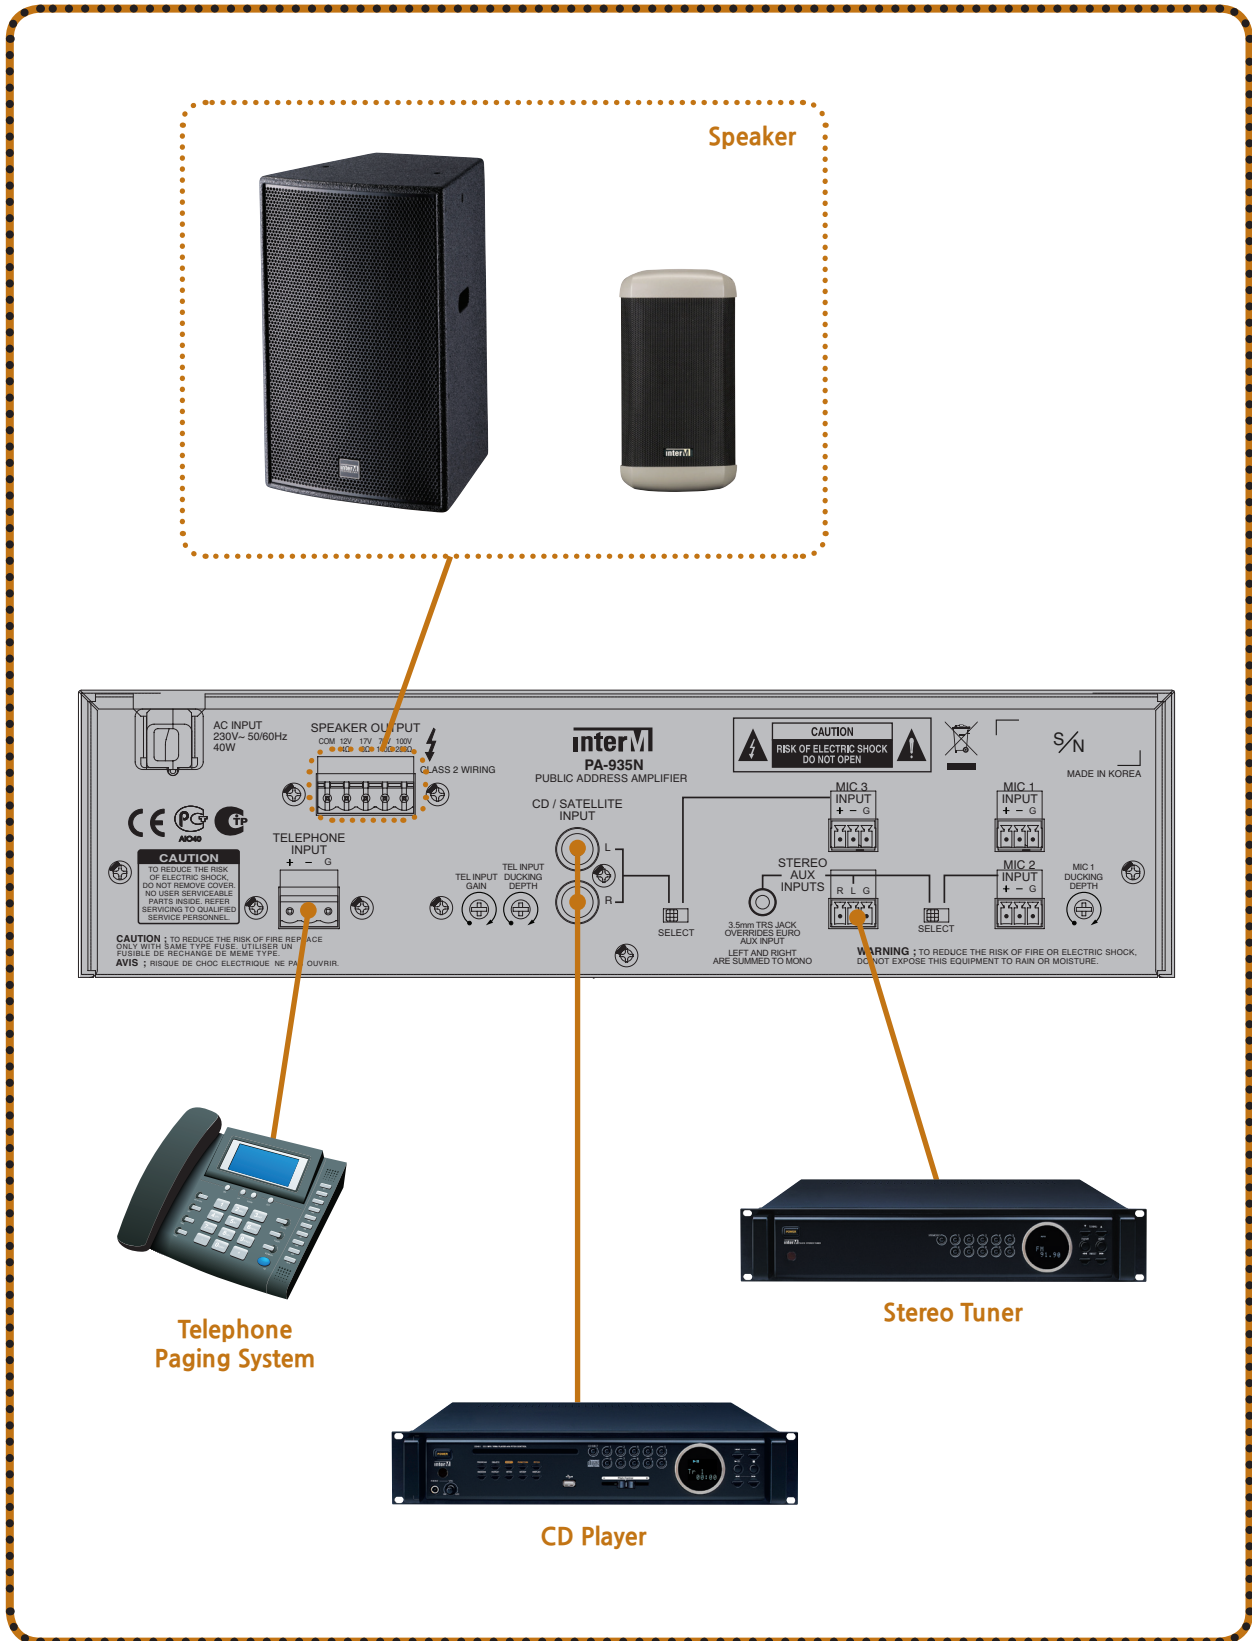

**Inter-M Corporation (IMK)**

653-5 Banghak-Dong, Dobong-Ku, Seoul, Korea

**Overseas Sales Team**

Tel : +82-2-2289-8141~7 / Fax : +82-2-2289-8149 / E-mail : overseas@inter-m.com

♣Specifications and design subject to change without notice.

[www.inter-m.com](http://www.inter-m.com)

2012. 02